


SSSP 6.1.1 player registration manual

Prerequisites


1. sssp folder should be there on server.

D series

1. Connect the power cable and network cable (if applicable) to the screen
2. Select the desired language and press *Next*

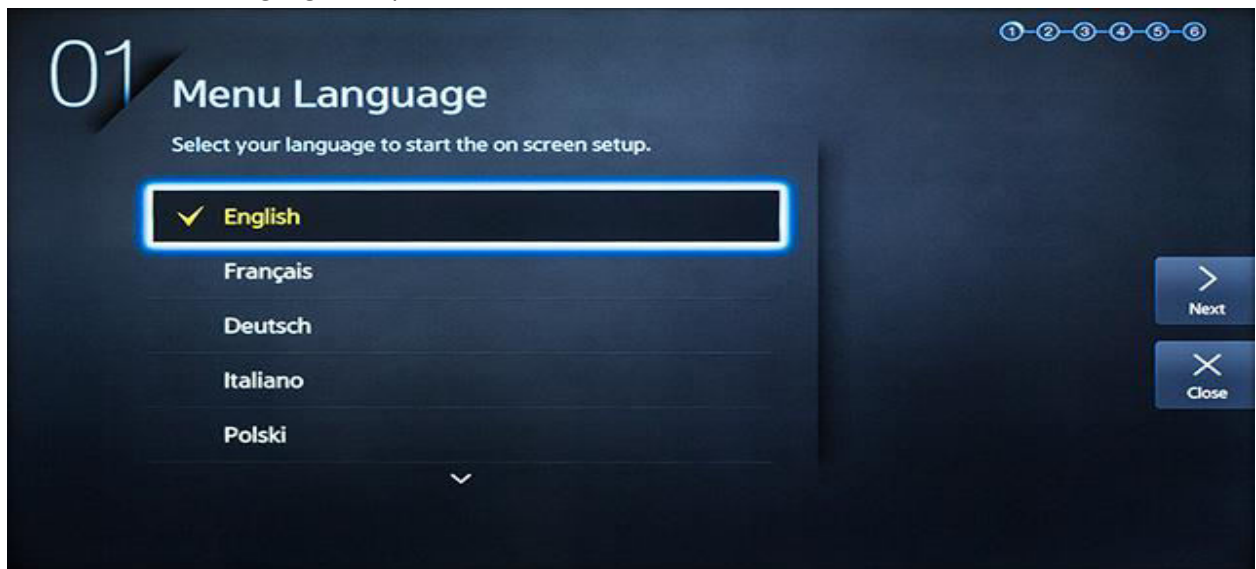

3. Select the display orientation and press *Next*

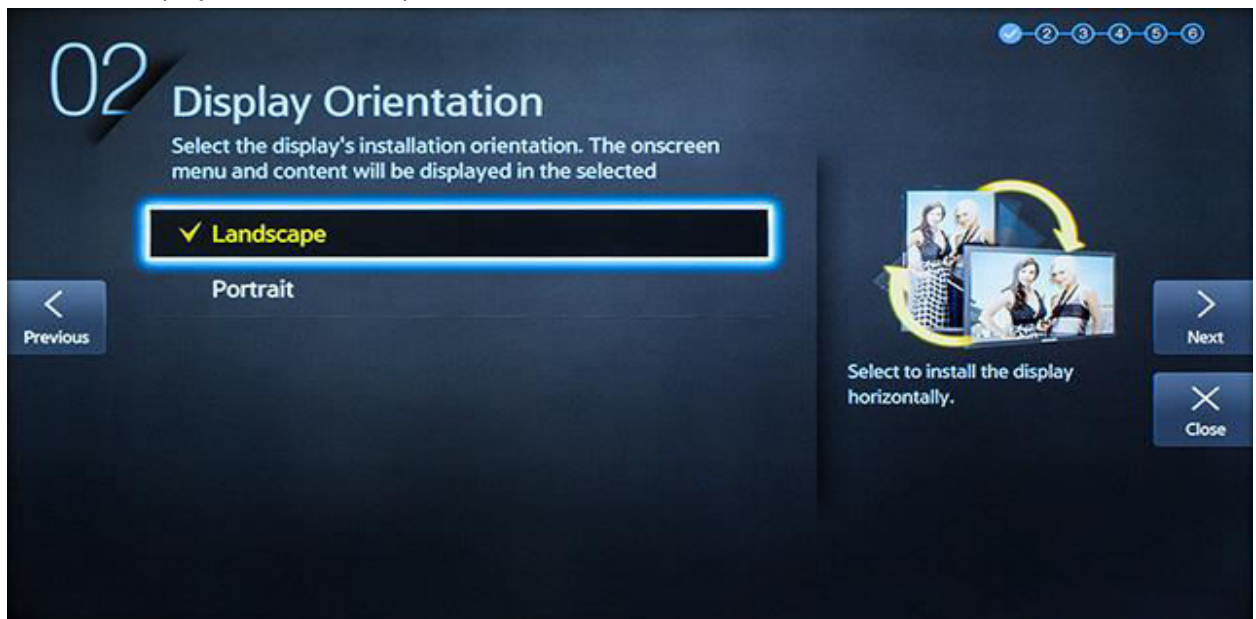


- The display will automatically detect your wired network. If you need to set up a wireless network or manual wired connection, please do appropriate settings. After network setup, press *Next*




- Set the current Date and Time and press *Next*




6. Set the player type to **URL Launcher** and press *Next*

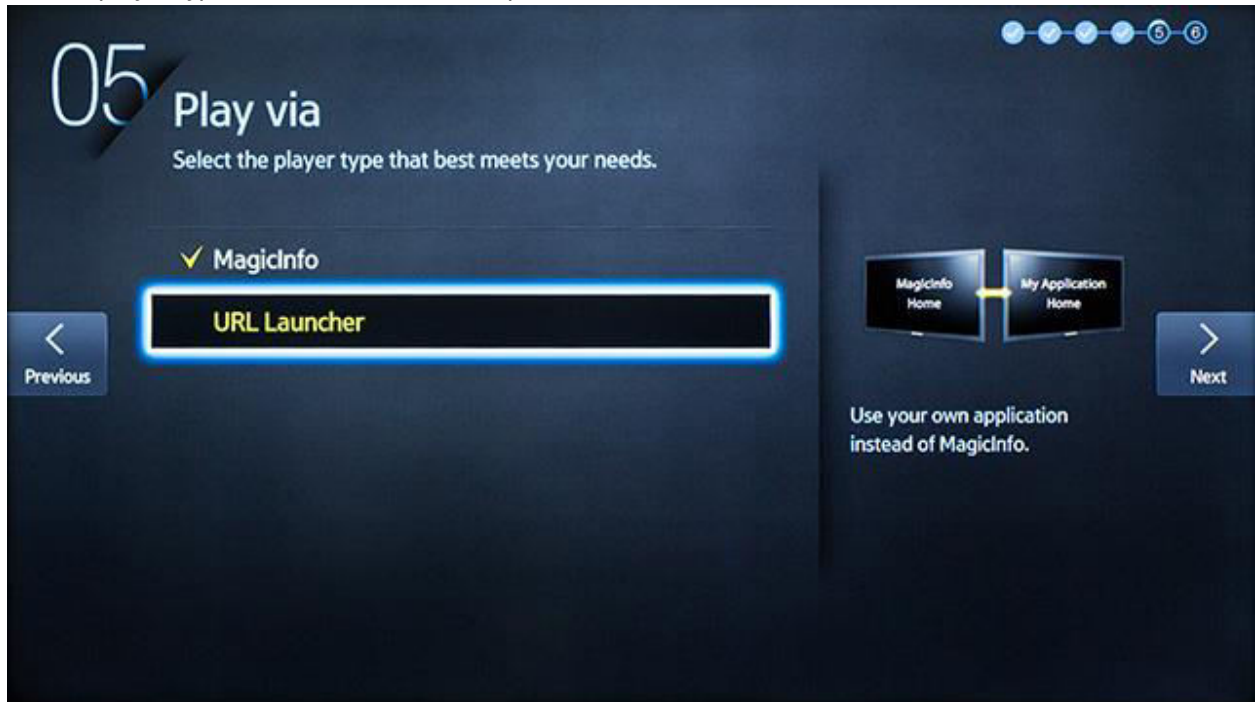


7. Enter the following URL
 - a. \$DEL, press done, press Launch URL: It will delete previous apps, if available. And will show home screen again (if already registered display).
 - b. **Landscape:** <http://serverIP/serverName/sssp/landscape/>
Portrait: <http://serverIP/serverName/sssp/portrait/>
and press *Done*, then press *Next*

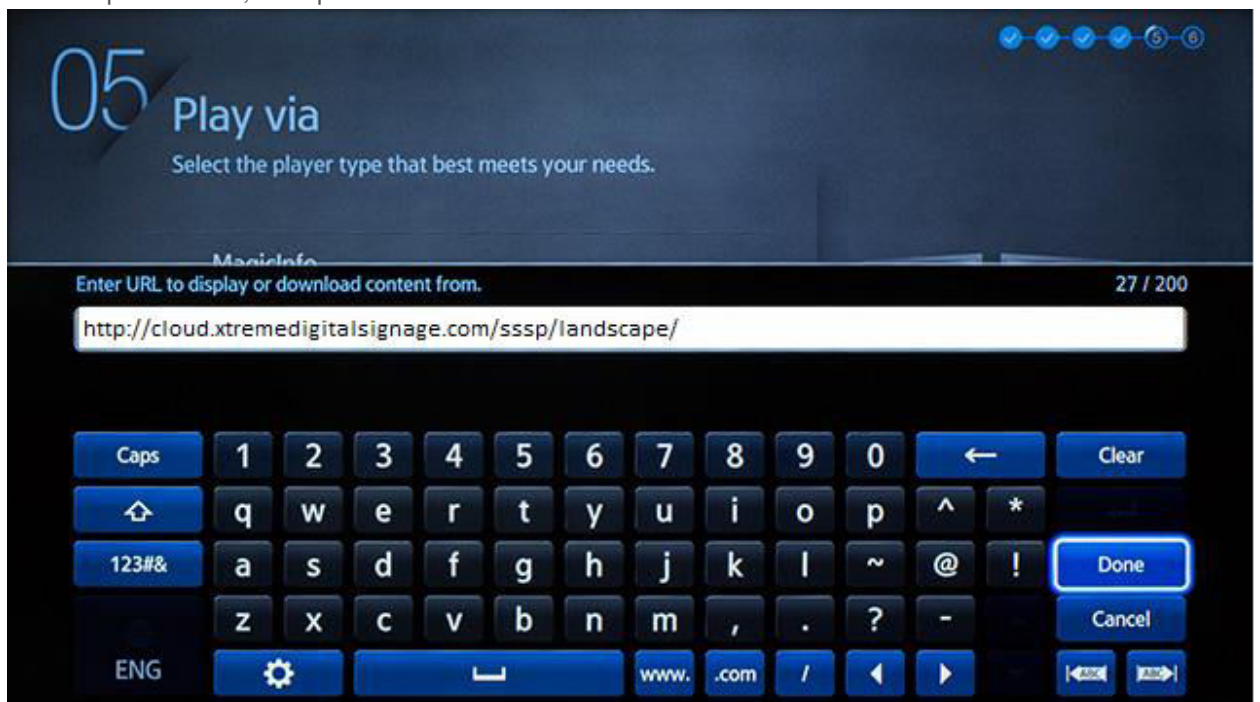

8. The initial setup is complete. Press *OK*

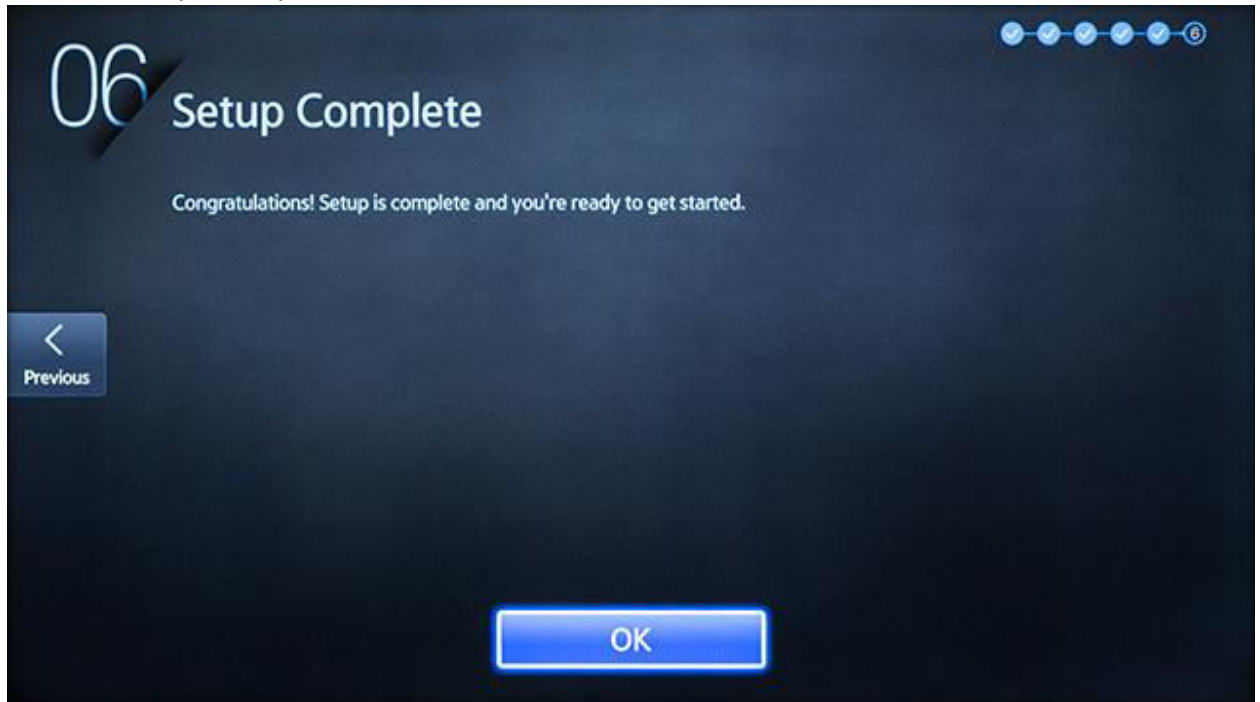

9. The main menu will be displayed. Select *URL Launcher* and press *OK* on the remote to start it

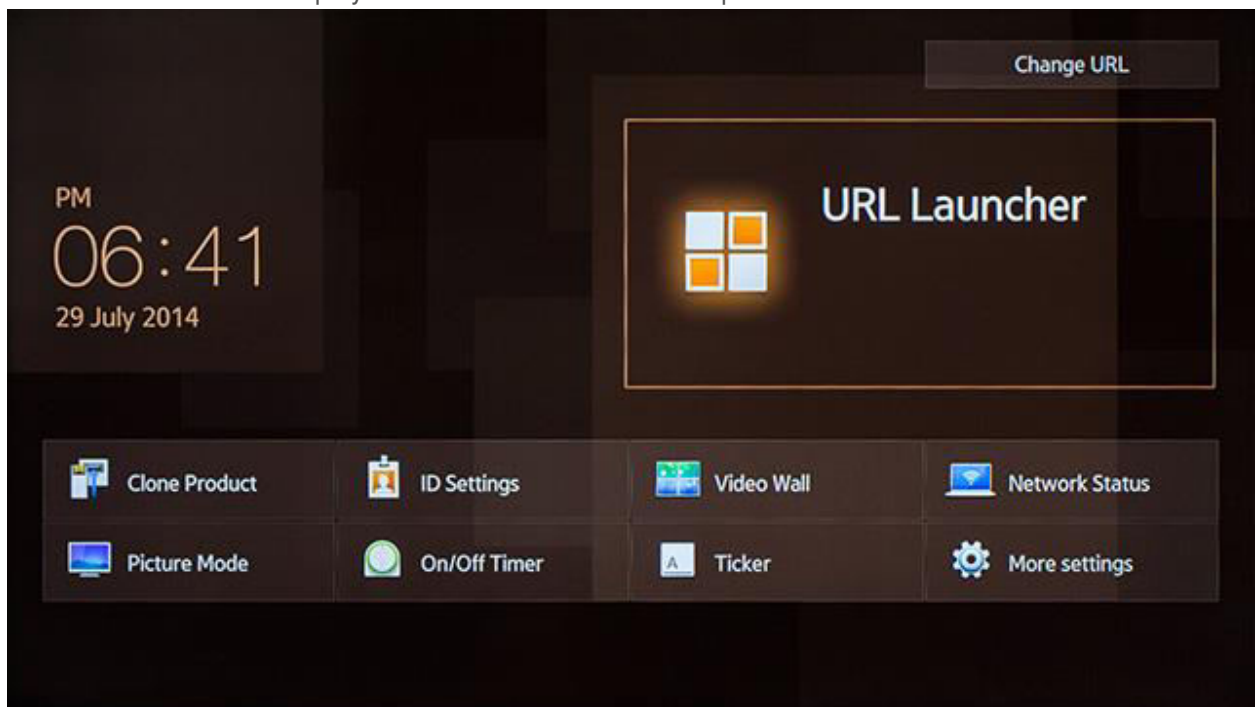


10. After this Registration form, will appear

E series

1. Connect the power cable and network cable (if applicable) to the screen
2. Select the desired language and press *Next*



3. Select the display orientation and press *Next*

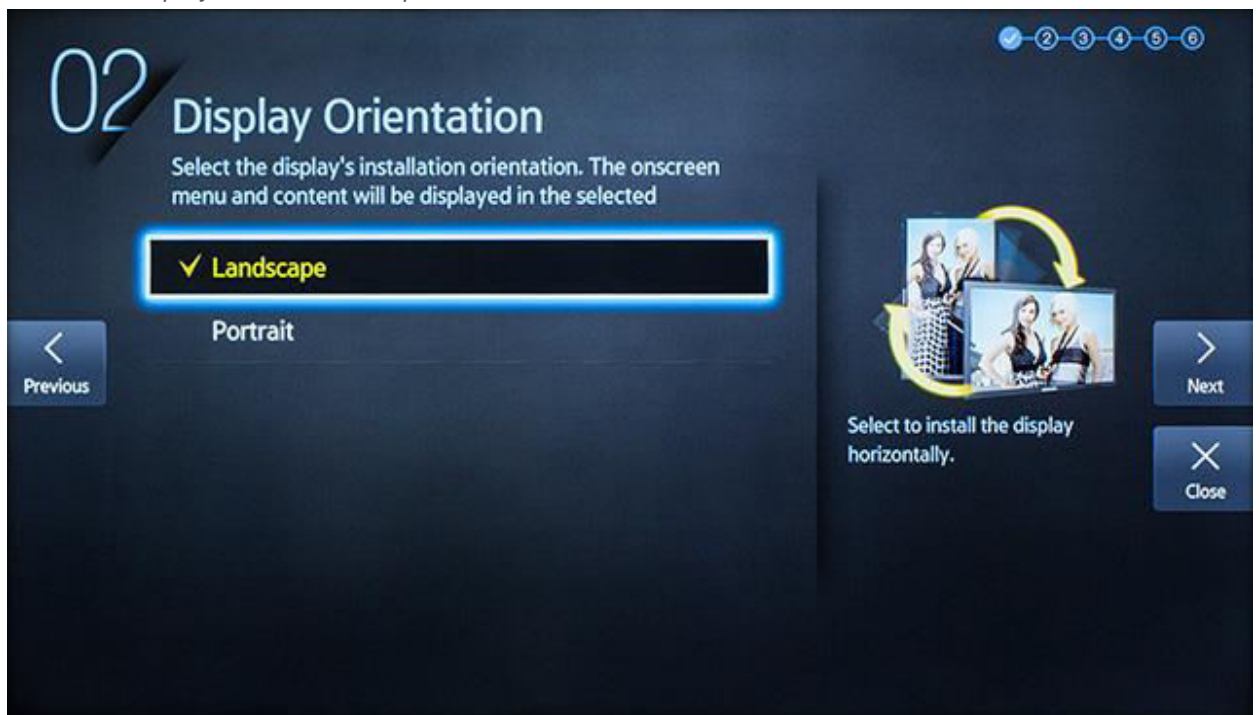


- The display will automatically detect your wired network. If you need to set up a wireless network or manual wired connection, please do appropriate settings. After network setup, press *Next*




- Set the current Date and Time and press *Next*




6. Set the player type to **URL Launcher** and press *Next*

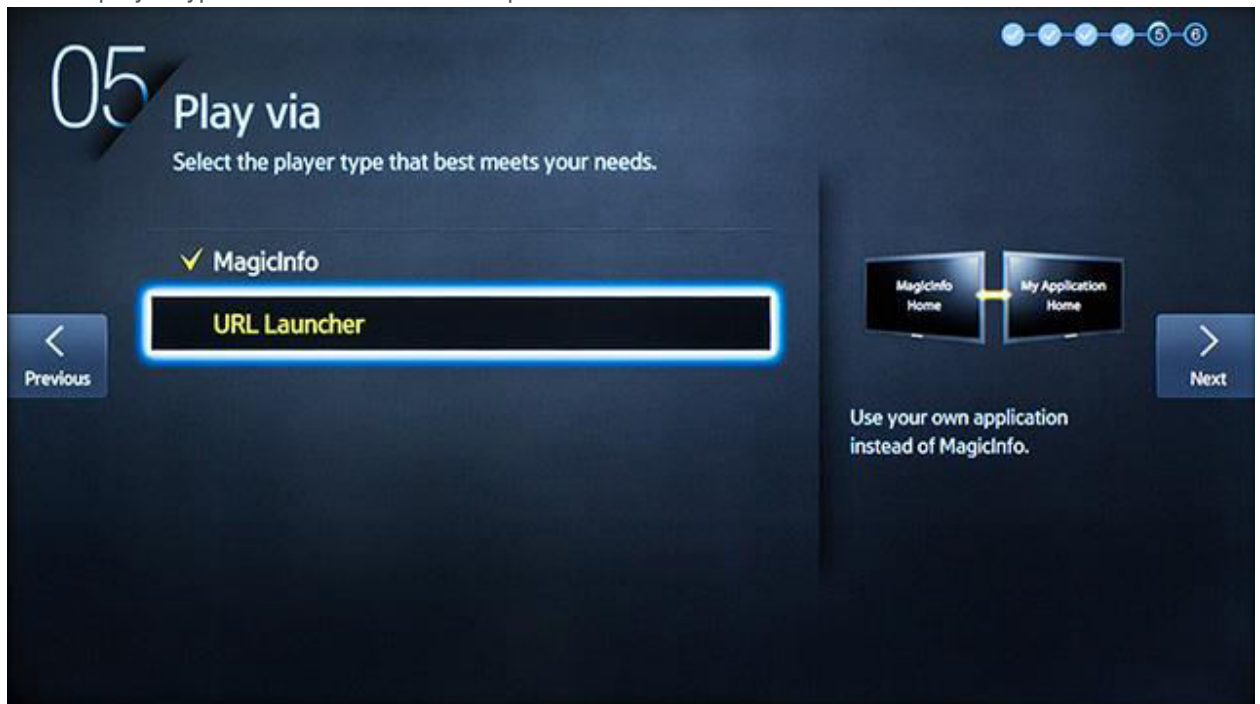


7. Enter the following URL
- \$DEL, press done, press Launch URL: It will delete previous apps, if available. And will show home screen again (if already registered display).
 - Landscape/portrait:** <http://serverIP/serverName/sssp/> and press *Done*, then press *Next*

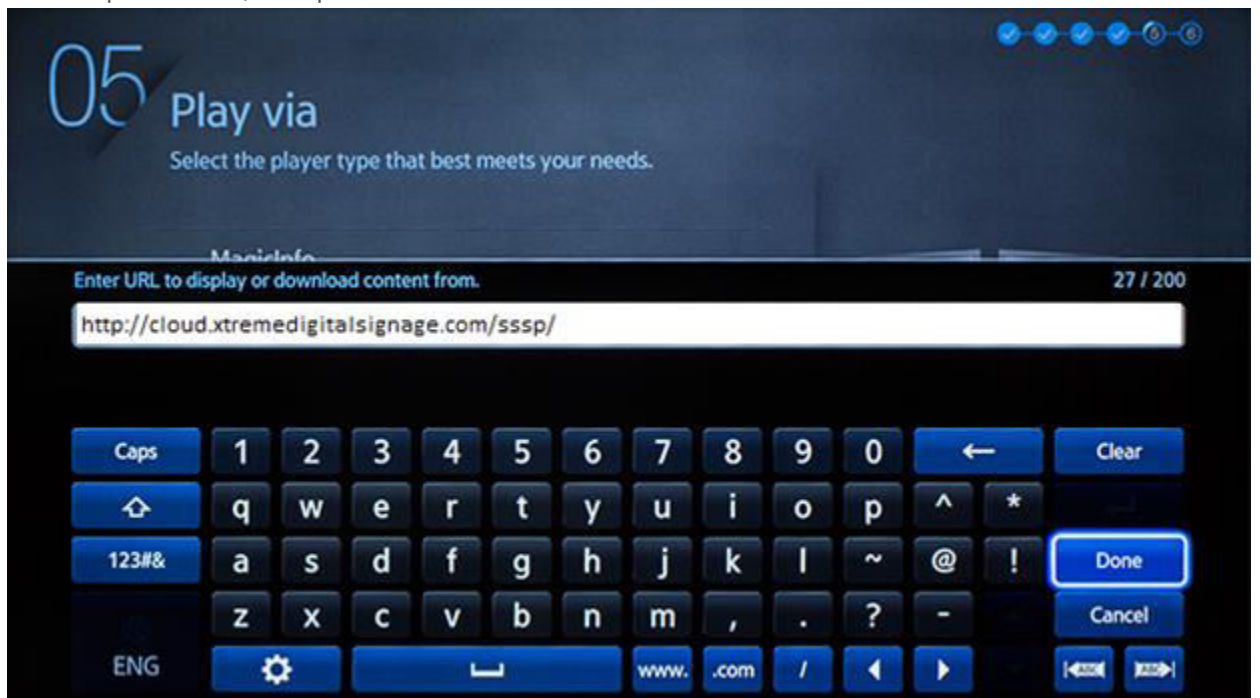


c. Select Device name for your device, then press *Next*

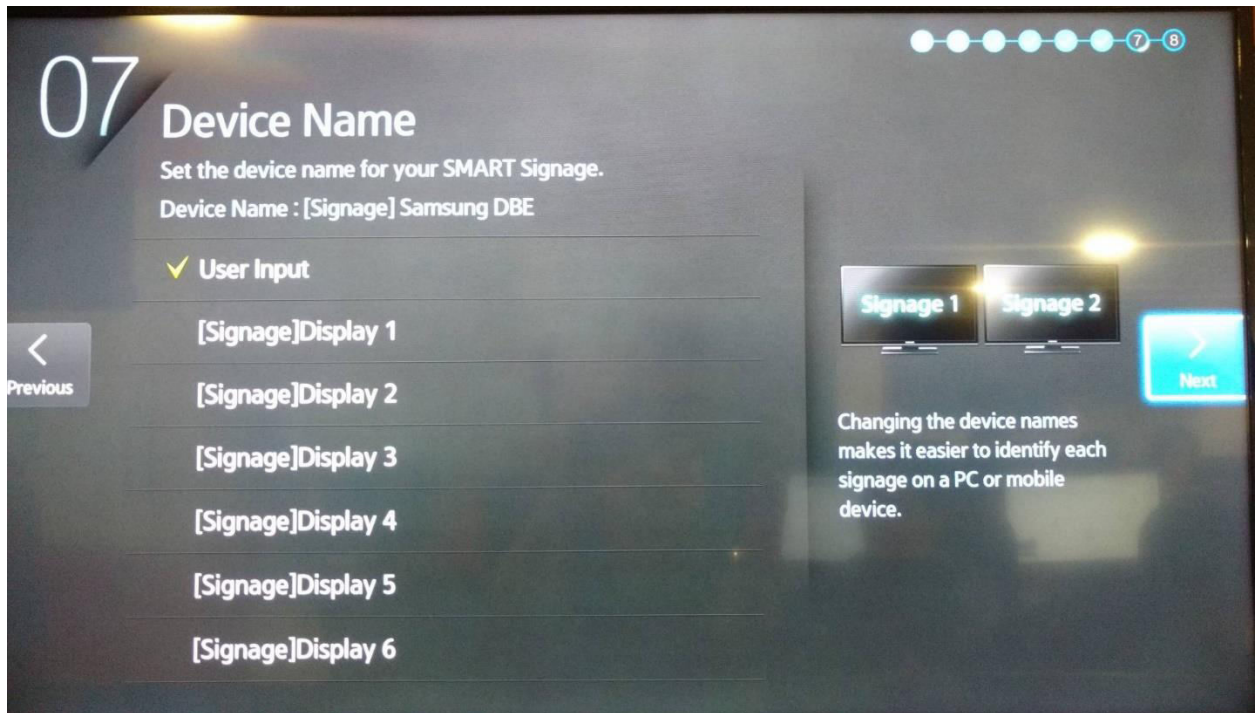


d. The initial setup is complete. Press *OK*

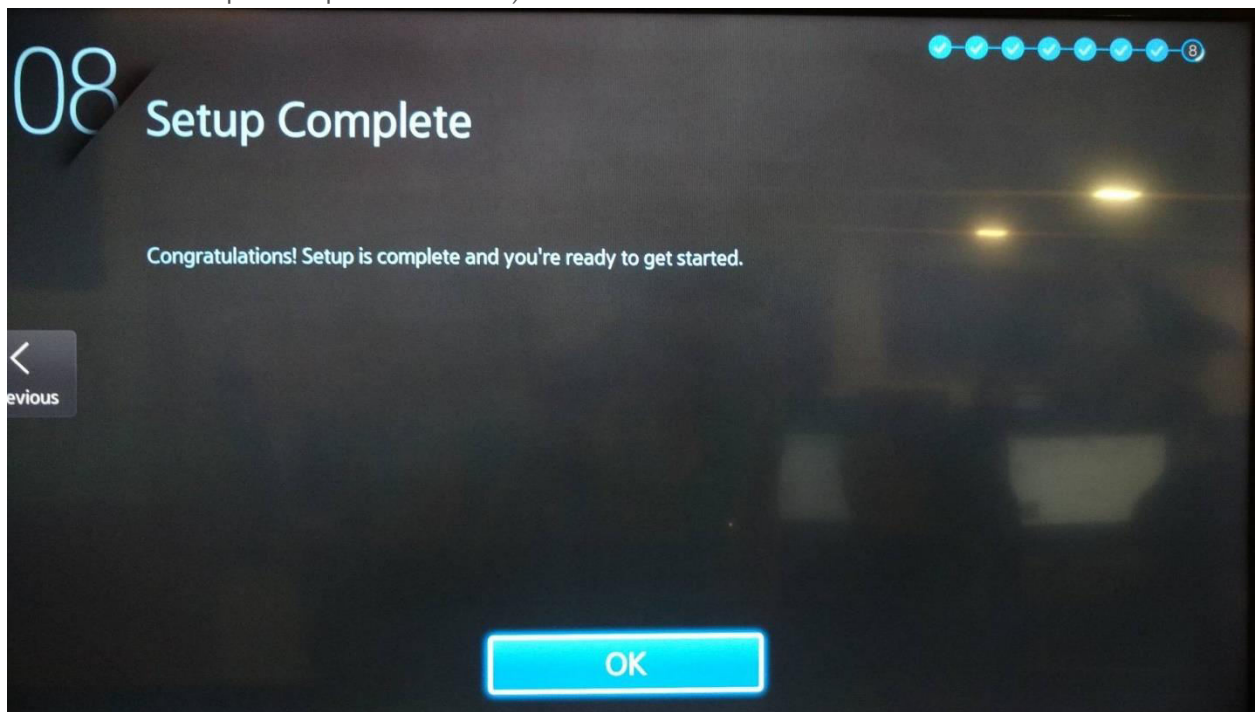

11. The main menu will be displayed. Select *URL Launcher* and press OK on the remote to start it

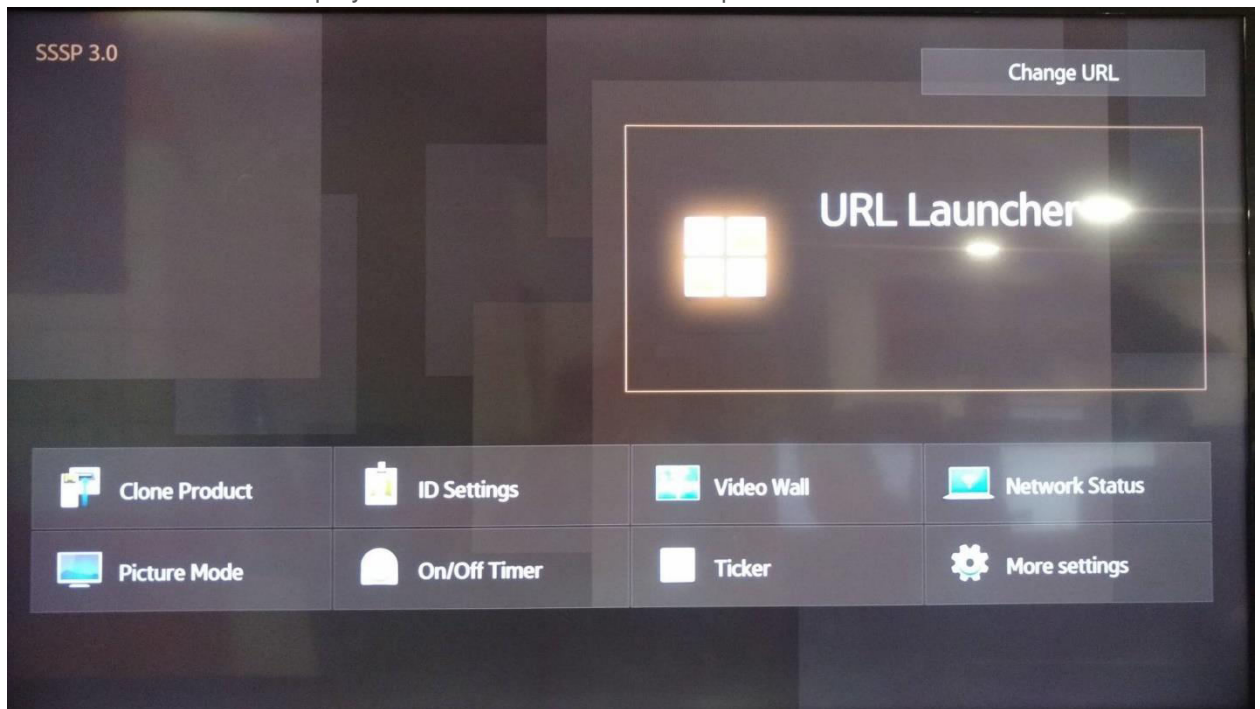

12. Mode selection page will appear, select landscape/portrait by pressing respective keys.

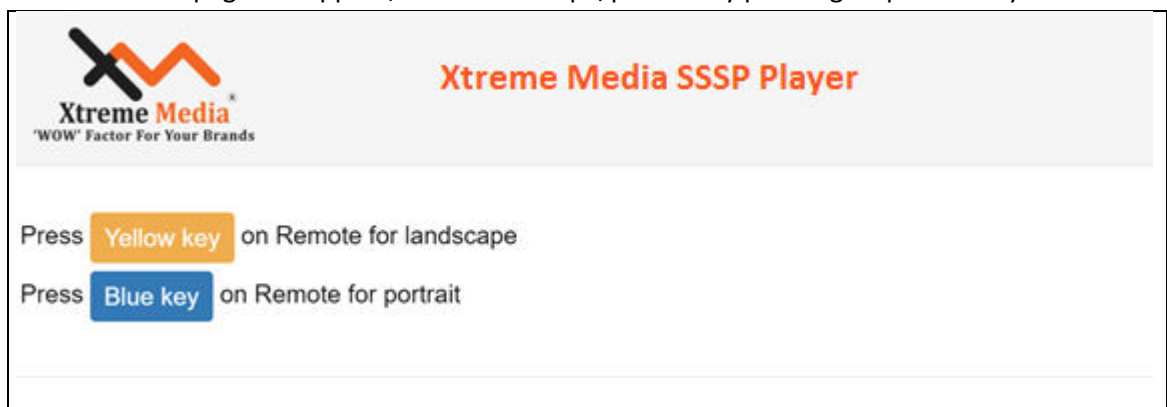

13. After selection, registration form will appear

NOTE: (for already registered display's orientation change)

If you want to register already registered landscape/portrait display to other forms, you should first factory reset the display and follow all the above steps again.

Factory Reset

1. Press Mute,1,8,2, PowerON buttons combination for Factory reset Menu.
2. select option -> Factory Reset -> Factory Reset. It will shut down the TV after reset.